

# Steady State, 1Ch, 1A, PAD2 1132/1

## External voltage control 0-10V

### This package consists of:


- PAD2 1132/1, Steady State control unit
- Power/Ttrigger cable, 5m

Specifications	
Voltage supply	24VDC (±10%)
Current requirement	max. 1A
Protection class	IP30
Operation temperature	0°C ....+65 °C
Storage temperature	-40°C....+80 °C
Storage humidity	max. 80%
Power output	max. 1A
Light intensity	0 to 100%



### Warning!

Do not connect to other than 24 V DC

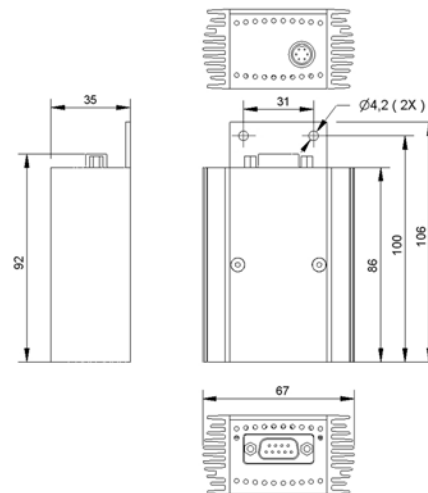

Power/trigger cable		
Yellow	24 VDC	Pin 1, 2
Brown	0 V	Pin 3, 4
Green	0-10 V	Pin 8
White	0 V	Pin 9

### Light head connector:

Pull back the spring-loaded housing before connecting and disconnecting.

### LED indication

